Technical Specification

Trademark Model ID	Sharp	
	50BJ2KE 50BJ2KO 50BJ3KE 50BJ4KE	55BJ2KE 55BJ2KO 55BJ3KE 55BJ5KE
Energy efficiency class	A+	А
Visible screen size (diagonal)	127 cm / 50 inches	139 CM / 55 inches
On-mode power consumption	70.0 W	110.0 W
Annual energy consumption *1	102 kWh	161 kWh
Standby power consumption *2	<0.50 W	<0.50 W
Off mode power consumption	n/a	n/a
Screen resolution	3840 (H) x 2160 (V)	3840 (H) x 2160 (V)

operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

^{*2:} When the TV is turned off with the remote control/standby button and no function is active.

	50BJ2KE 50BJ2KO 50BJ3KE 50BJ4KE	55BJ2KE 55BJ2KO 55BJ3KE 55BJ5KE	
RF	75 ohm Antenna / Analog / DVB / Satellite		
Inputs	3 x HDMI, 3 x USB, 1 x SD card reader, 1 x RJ45 LAN/Ethernet, 1 x Composite/CVBS Video & Component/YPbPr Input, 1 x L/R Audio input for Composite/CVBS & Component YPbPr		
Sound Outputs	1 x Digital Optical Audio output, 1 x 3.5mm Headphone		
Speaker*/ Amplifier Watts (RMS)	2 x 10 / 2 x 8		
Voltage and power consumption	AC 220V ~ 240V; 50Hz 70/95/115W (home mode/standard/ max) (<0.5W in Standby)	AC 220V ~ 240V; 50Hz 110/145/180W (home mode/ standard/max) (<0.5W in Standby)	
Dimensions including stand (mm)	1124W x 698H x 254D	1239W x 765H x 254D	
Net weight (Kgs)	12.2	14.2	
Wall Mounting	VESA 200 x 200 (mm)	VESA 400 x 200 (mm)	

^{**}Built-in Harman Kardon speaker systems (Full-range speaker and tweeter).

harman/kardon

Harman Kardon is trademark of HARMAN International Industries, Incorporated, registered in the United States The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

package your item in the event of warranty/service repair is in it's original box/packaging. We are unable to carry out warranty/service if you are unable to package it correctly. The safest way to Please save your box/packaging as you will need this in the event of warranty/service repair or support.

Note that to use the full functionality of Freeview Play your set must be connected to the internet.

alternative means of searching. recommendations of the major broadcasters and offers an to select from when searching for programmes, such as sport, comedy, dramas and soaps, etc. Content is made up from Freeview Play brings together live TV viewing with "catch up" TV services such as BBC iPlayer, ITV player, More4 and Demand 5. The Freeview Play Explore app features a carousel of genres

Please note that any Freeview HD channels found during tuning will be placed in channel positions above 100. For

You can check coverage for your postcode good Freeview coverage area. channels, you will need a Digital TV aerial and be in a To receive Freeview channels, in particular Freeview HD

example, 101 (BBC1 HD) 102 (BBC2 HD) etc.



will not be able to access content that requires the upgrade. Content owners may require you to upgrade PlayReady to access their content. If you decline an upgrade, you Revocation should not affect unprotected content or content protected by other content access technologies. content owners may require Microsoft to revoke the device's ability to consume PlayReady-protected content. and/or WMDRM-protected content. If the device fails to properly enforce restrictions on content usage, including copyrighted content. This device uses PlayReady technology to access PlayReady-protected content Content owners use Microsoft PlayReady^m content access technology to protect their intellectual property,

of this technology outside of this product is prohibited without the appropriate license(s) from Microsoft. This product contains technology subject to certain intellectual property rights of Microsoft. Use or distribution

Microsoft PlayReady**



cables either from your retailer or at www.umc-uk.co.uk/cables Should you wish to connect older/analogue devices to your television, you can purchase the necessary

Additional Accessories

1 x Wall bracket spacer kit

1 x Stand installation pack 1 x Safety Leaflet

1 x Remote Control and x x Aeries 1 x Quick Start Guide

Included with this TV are the following accessories **Accessories**

what is included in the box

Online Manual To launch the Online Manual, press the [MENU] button and then select Settings>About TV>Help Information>View

leuneM anilnO



Quick Start Set Up Guide

For information on using the TV's features, please refer to the Operating Instructions. (Available online to download.)

Register vour manufacturers guarantee

online within 14 days of purchase at

www.registertoday.co.uk/sharp and enter into a prize draw to

Win a **SHARP**

Soundbar

Quick & easy guide for setting up your TV

55BJ2KE

55BJ2KO

55BJ3KE

55BJ5KE

What is included in the box Using the remote control Setting up the TV for the first time - including attaching the stand Connecting other devices to the Television

Need help setting up or using your TV?

Please contact the UK & ROI Helpline* Telephone UK 0330 024 0803 or ROI 01443 3323 Online support at: www.umc-uk.co.uk Email support at: service@umc-uk.co.uk

*Calls to 0330 numbers are charged at standard call rates and are included as part of any bundled minutes with your phone provider.

Calls to the ROI number are charged at the local call rate.

The telephone opening hours are Monday to Friday 8.30am to 6pm, Saturday 9am – 5pm.

Bank Holidays - 10am to 4pm

Model Numbers

50BJ2KE

50BJ2KO

50BJ3KE

50BJ4KE

Closed Christmas and New Years day








to program it with the code 4170. your 5ky Q remote to operate the TV's basic functions, you will need you will need to program it with the code 2134. If you wish to use functions, you will need a 5ky remote control (Revision 9 or later) and If you wish to use your 5ky remote to operate the TV's basic

Sky Remote Code

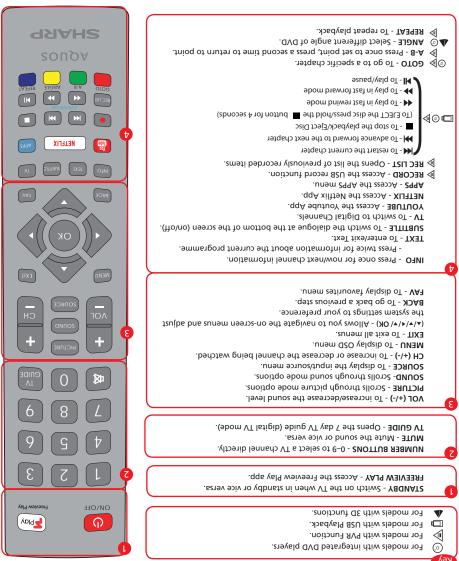

Setting up the TV set for the first time

1 Fitting the stand

TV panel must be facing downwards.

For the stand installation, there is one type of screw provided as shown below.

Note: To complete the stand installation you will require a cross head screw driver.



Used for attaching the stand to the TV set (fig.2)




Place the TV set on a flat and clean surface with the panel facing downwards to avoid damage.



2


When the stand feet are installed correctly the stand feet will be longest at the front of the TV and shortest at the back with the feet pointing away from each other.



When the stand/feet are in the correct position, secure the feet to the underside of the TV set using 4 screws provided.



2 Connecting your set



1) Connect the TV to your power socket.

2) If you wish to use the TV to receive Freeview/Saorview channels, connect the RF input from the TV to your outdoor Digital TV aerial. If you do not wish to receive Freeview/Saorview, skip this step.


3 Powering On the TV

TV Control Stick



Switch on the television by pressing the TV control stick located on the TV set.

Remote Control: Installing Batteries



Insert the batteries supplied into the remote control and press the standby button to power on the TV.

Wall Mounting the TV




Image for illustration only.
For the dimensions of the VESA mounting, please refer to the Technical Specifications rection of this desument.

1. Remove the four screws that are supplied in the wall mounting holes.

attached to the mounting holes on the rear of the TV.

3. Install the wall mounting bracket to the

2. The wall mount can now be easily

 Install the wall mounting bracket to the television as advised by the bracket manufacturer.

The picture shows the use of spacers, which are not applicable to all sets/installations.

4 First time installation Basic installation steps are shown below. These may vary slightly depending on model.



Introduction

When the set first turns on, it enters the First Time Installation mode. This can be restarted by restoring the set to default settings in the 'About TV' Menu.

Note: In home mode, the TV will switch off automatically after 4 hours in the event that no buttons are pressed on the TV or remote control. (You can change this by pressing the [MENU] button and then selecting Settings>Time>Auto Standby)



Environment of Use

Home Mode: For normal use, by default it is set to a power saving mode which reduces the energy used by up to 25% (by reducing the power to the LED/LCD panel). This can be changed in the picture mode settings.



Default Source

Select the source which you use the most. If Digital TV (Freeview) is chosen, then at the next step, the set will tune in and default to Digital TV (Freeview). If one of the other sources is selected, then the set will not tune in at this stage and default to that input. If it is required to tune the set in later, press the [MENU] button and then select Settings>Channels



Select your preferred on-screen display language. This will change the language in which the menus and associated information is displayed in. When set up has been completed, to change this press the [MENU] button and then select Settings >



Network setup

You can connect the TV to your broadband router or wireless network in order to take advantage of the Smart functions. If you connect the TV to your router using an Ethernet cable (recommended) this step will be skipped.



Tune in Channels

Choose to install terrestrial channels now or later.



Select the correct flag for the country in which the set will be used in. This will enable the set to correctly install the functions applicable in the country of use.



Set Up Netflix

If you have a Netflix account, it can be set up on the television here. Once set up and validated, the First Time Installation returns to the next step.




Support Advice

Information regarding support is displayed for a little while. Tuning continues and a progress bar is shown with the number of channels found indicated below.

If you are picking up signals from more than one transmitter, you will be requested to select your primary and secondary regions.

Connectivity

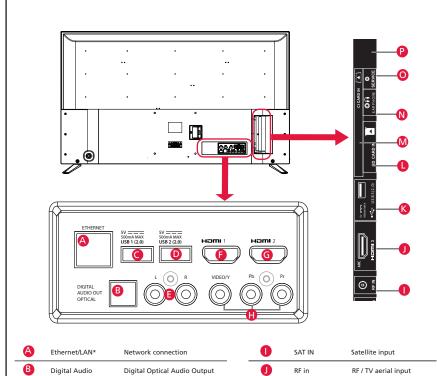

B	Digital Audio	Digital Optical Audio Output
(USB 1	USB port 2.0
D	USB 2	USB port 2.0
3	L/R	Audio shared for Video/Composite and component/ YPbPr
(HDMI 1	HDMI input
G	HDMI 2	HDMI input
(1)	Video/YPbPr	Video Input (green) and HD input (Ypbpr)

M CI card in Common interface modu

N SD SD card input

Earphones Earphone input

P Service Input sused only by service centres

K

* The Ethernet/LAN port is used for Freeview HD services and smart functions.